MODELS TS-2, TS-2-2, TS-3, TS-3-2

REQUEST TO EXIT STATIONS

TS-2
TS-2-2

TS-3
TS-3-2

- TS-2, TS-3 are SPDT
- TS-2-2, TS-3-2 are DPDT
- Large LED Illuminated Green Button Operates on 12 or 24 Volts AC or DC
- Momentary Action Switch
- Contacts rated 10A @ 35VDC
- Switch mounted on a single gang stainless steel electrical plate
- Conforms to UL Standard 294 for Access Control, File Number SA32686
- TS-3, TS-3-2: 1/2” Red LED Operates on 12 or 24 Volts AC or DC

INSTALLATION INSTRUCTIONS
MODELS TS-2, TS-3, TS-4, TS-5

U.L. FILE SA32686 CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL

REAR VIEW OF PLATE

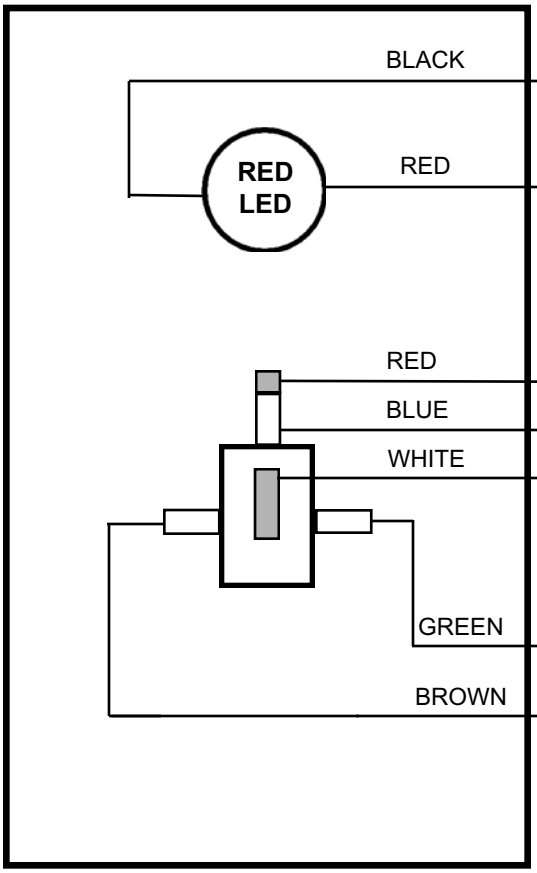

RED LED 12/24 VOLTS DC
RED LED ONLY ON TS-3, TS-5

LED CURRENT RATING
9 MA. @ 12 VDC, 19 MA. @ 24 VDC

NEGATIVE (BLACK) LEAD

POSITIVE (RED) LEAD

SWITCH CONTACTS
RATED 2A. @ 12 - 28 VDC

N/C (RED) LEAD LOWER LUG

N/O (BLUE) LEAD UPPER LUG

COM (WHITE) LEAD TOP LUG

INTERNAL LED
LED (GREEN) NEGATIVE LEAD
LED WILL OPERATE ON 12/24 VDC
LED (BROWN) POSITIVE LEAD

LED CURRENT DRAW

4 MA. @ 12 VDC

15 MA. @ 24VDC

LED OPERATES ON 12/24 VDC

MOUNT WALLPLATE IN A VERTICAL POSITION
MODELS TS-2, TS-3, TS-4 & TS-5 SHOULD BE MOUNTED IN A 2.5 INCH DEEP ELECTRICAL BOX

INSTALLATION INSTRUCTIONS
MODELS TS-2-2, TS-3-2, TS-4-2, TS-5-2

U.L. FILE SA32686 CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL

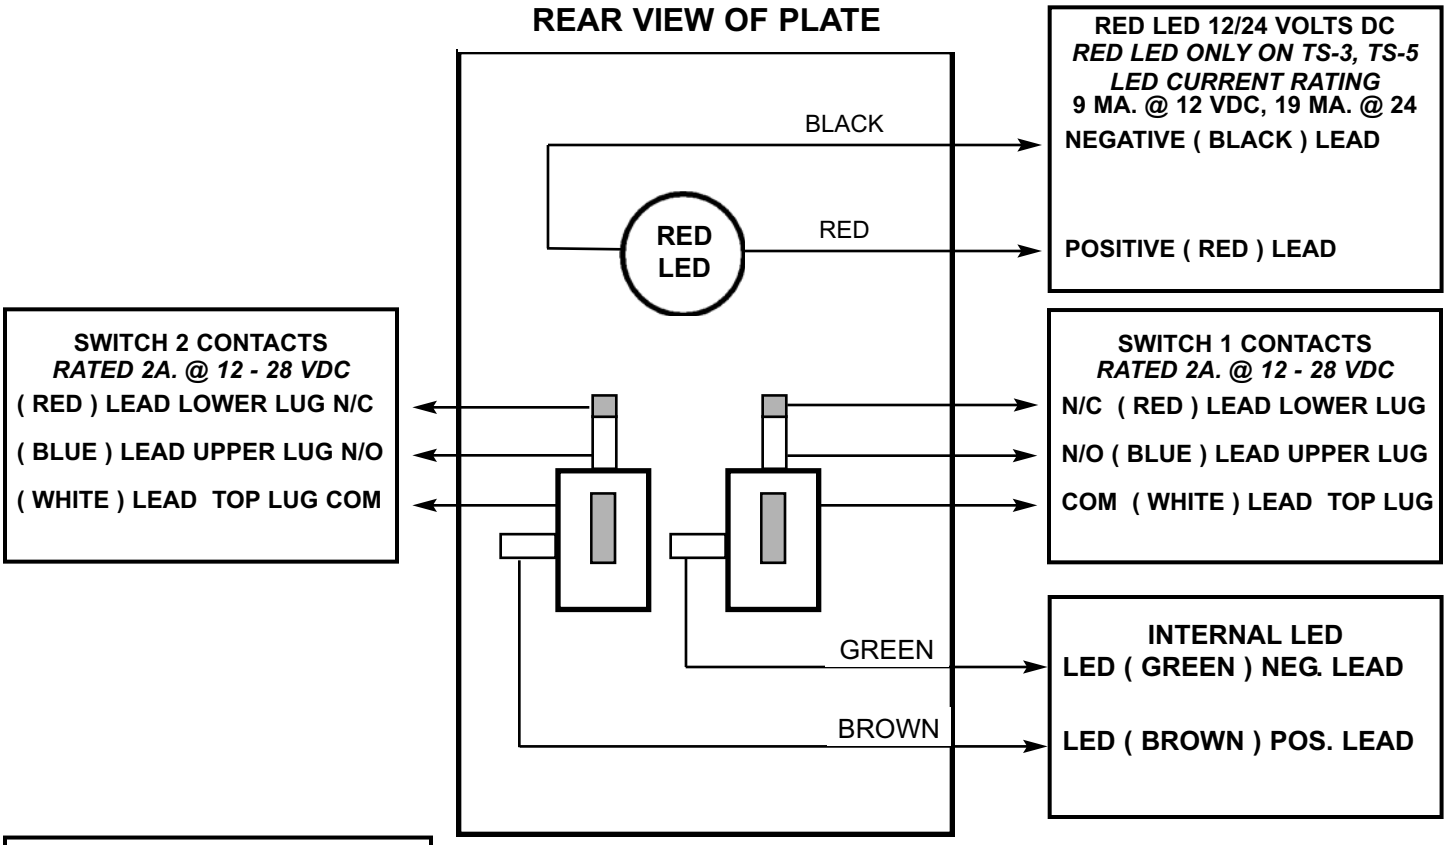

MOUNT WALLPLATE IN A VERTICAL POSITION

MODELS TS-2-2, TS-3-2, TS-4-2 & TS-5-2 SHOULD BE MOUNTED IN A 2.5 INCH ELECTRICAL BOX

LED CURRENT DRAW
4 MA. @ 12 VDC
15 MA. @ 24 VDC

LED OPERATES ON 12/24 VDC